


# TYPICAL PAVEMENT RESTORATION DETAIL

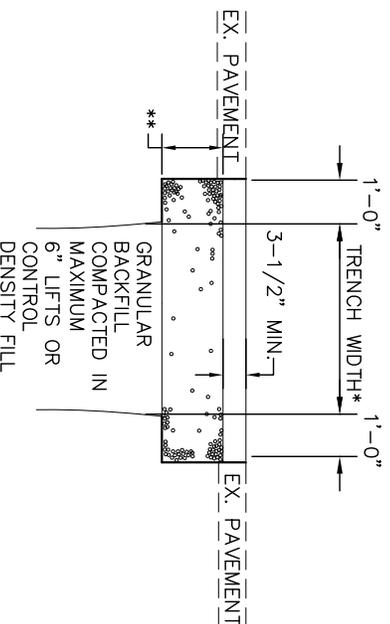

**TYPICAL PAVEMENT RESTORATION DETAIL**

\* MIN. 18" WIDTH IF ASPHALT BACKFILL IS USED IN THE REPAIR.

\*\* CONCRETE OR 301 ASPHALT AGGREGATE BASE TO MATCH EXISTING CONDITION.

## TYPICAL PAVEMENT RESTORATION NOTES

### MINIMUM GRAVEL PAVEMENT REPLACEMENT

2" OF ODOT #67 ON  
12" OF ODOT ITEM 304, IN LIFTS OF 3" MAXIMUM

### MINIMUM ASPHALT PAVEMENT REPLACEMENT

PERMANENT PAVEMENT REPLACEMENT SHALL MATCH EXISTING PAVEMENT THICKNESS, BUT MUST BE A MINIMUM OF 3-1/2 INCHES, WHICHEVER IS GREATER. (MINIMUM PAVEMENT COMPOSITION SEE PAGE 300-2 UTILIZING APPROPRIATE STREET CLASSIFICATION).

SOIL BORINGS SHALL BE CARPED WITH A MINIMUM OF 9" OF ODOT CLASS C CONCRETE.

REVISIONS:  
10-12-09

DATE  
APPROVED:  
FEB. 2002

PAGE No.

300-19